


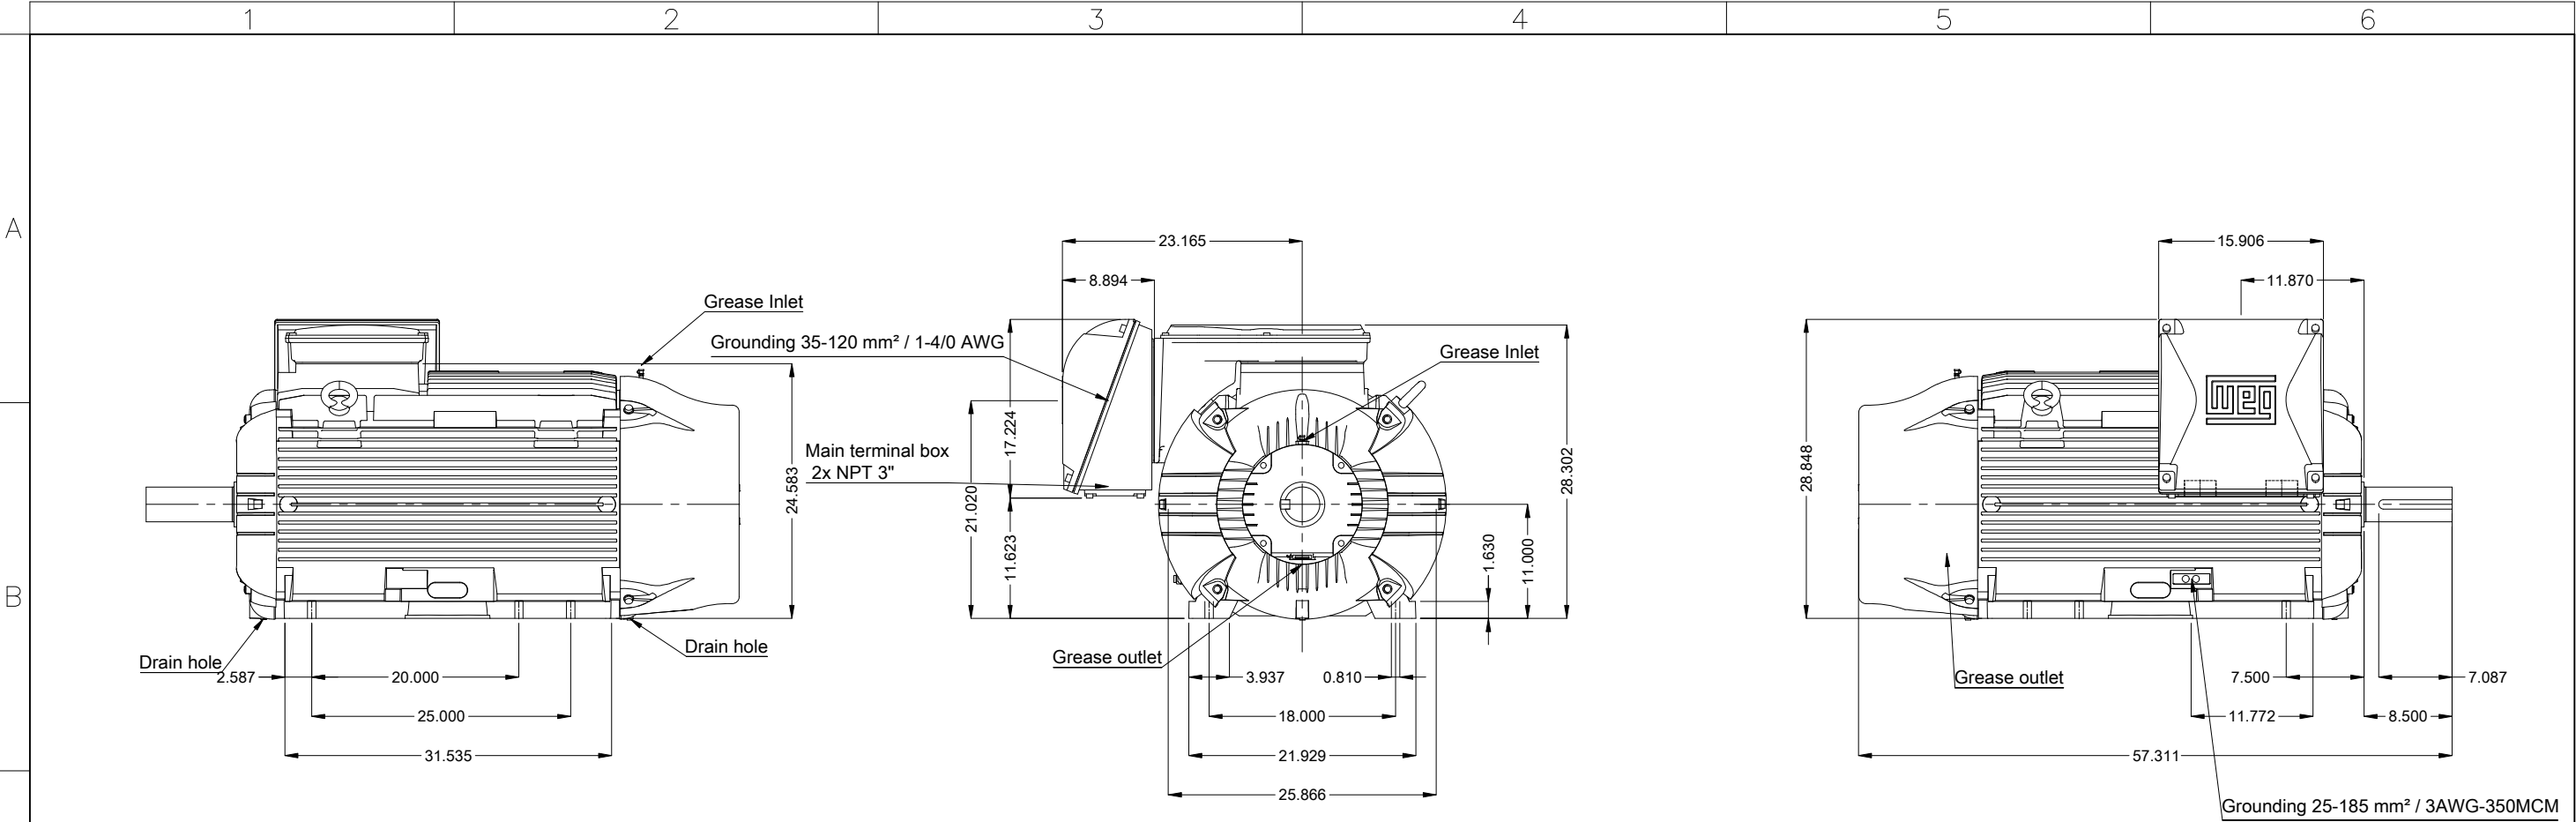


C


D

E

NDE endshield with electrically insulated bearing hub
Drive-End Air Deflector
Color RAL 5009
Painting plan 203A
Mounting B3R(D)



400 HP 04 Poles 60 Hz A

				Scale		1 : 16				
					HYBRISUSER		00			
ECM	LOC	SUMMARY OF MODIFICATIONS			EXECUTED	CHECKED	RELEASED	DATE	VER	
EXECUTED	HYBRISUSER	 THREE PH. MOTOR W22 NEMA PREM. EFF. FRAME L447/9T IP55 TEFC				PREVIEW				
CHECKED						WDD				00
RELEASED						SHEET				1 / 1
EL. DATE										

MADE IN MEXICO

11408291


NEMA
Premium
W22

MODEL 40018ET3G449T-W22

 Inverter Duty Motor
 Severe Duty
 With NDE insulated endshield

PH3 60Hz Fr. L447/9T 1000m.a.s.l. IP55 TEFC 3228lb

V 460

A 445

HP 400

kW 300

SF 1.15

SFA 512

RPM 1785

PF 0.88

AMB 40°C

INS cl. F DT80K NEMA NOM EFF 96.2%


DUTY CONT.

DES B Code G


 FOR SAFE AREA
 Mod.TE1BFOXON
 CC029A

 Class I, Div 2, Gr A, B, C, D - T2C
 Class I, Zone 2, IIC - T2C
 Class II, Div 2, Gr F, G - T3C
 For use on PWM: Gr. A, B, C, D, F,
 VT 1000:1, CT 6:1, 1.00SF - T3

PART-WINDING



→ 6322-C3 (60g)

→ 6319-C3 (45g)



MOBIL POLYREX EM (6000h)

