


Automatic Pallet Systems



Optional Midaco Fan for
Automated Chip Cleaning



CE Light Curtain Option



Retrofits to Any
NEW or EXISTING
Machining Center

Change Parts **OUTSIDE**
the VMC WHILE Your
Spindle is Cutting!

AUTOMATIC PALLET SYSTEMS

Quality control tested with over 250,000 pallet changes before bringing product to market.



- Load, unload, inspect parts and set up jobs while alternate pallet is in the machine.
- Reduce set up time on repeat jobs by dedicating tooling onto pallets.
- Exchange pallet in seconds with +/- .0001" (.0025 mm) repeatability.
- Pallets easily interchanged between machines or departments.
- Fully integrated with CNC machine by using two M-Functions.

- Heavy/large workpieces easily loaded outside the machine.
- Single shuttle systems up to 8000 lb (3636 kg) capacity*
- Dual Shuttle systems up to 32,000 lb (14,528 kg) capacity*
- Jobs can be easily interrupted for emergency.
- Increase machine and operator productivity.
- Equipped with Mitsubishi controls.

**with part weight evenly distributed*



STATE OF THE ART VERSATILITY





Keypad (B) Provides:

- Password protected access
- Parameters page access
- Manual functions access
- Current I/O status
- Diagnostic pages


- MIDACO's PLC is fully integrated with the machine.
- While the alternate pallet is on the machine, the operator sets up the next pallet. Once ready, the operator pushes the "Pallet Ready" button (A) and walks away to attend other activities. When the pallet in the machine is complete, the next pallet shuttles in automatically.
- The PLC allows the operator to program pallet acceleration and deceleration according to the weight of the fixture to optimize performance.

Electric Servo Drive Provides Proven Reliability

MIDACO's precision engineered Servo Drive assembly (C) extends into the machining center, tilts and engages with the pallet coupler (D) to remove the pallet from the machining center. The Servo Drive then delivers the next pallet into the machine in seconds.

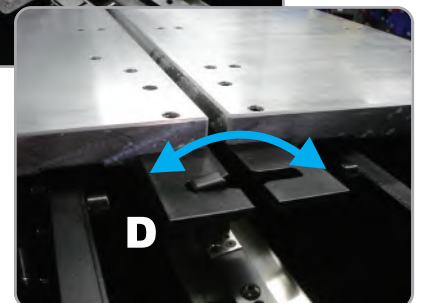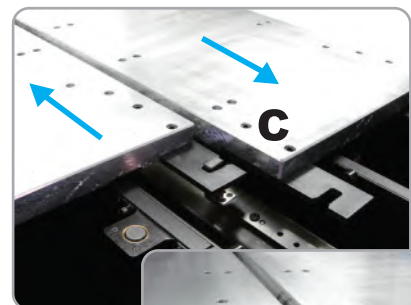

RECEIVER

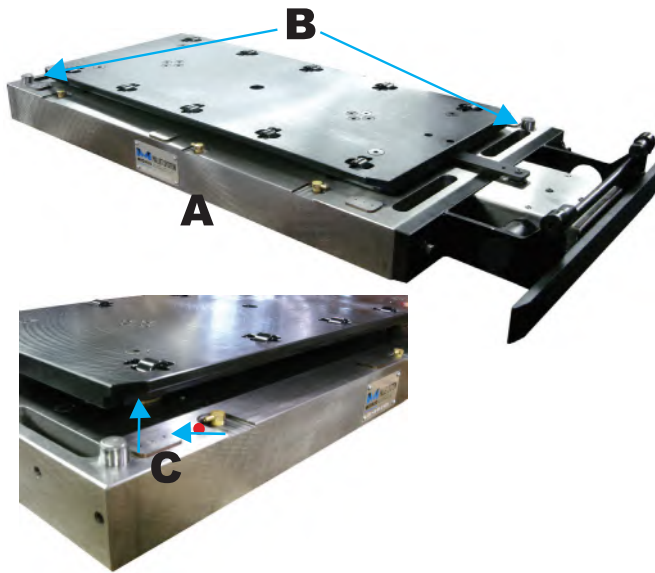


(A) Cast Iron receiver mounts directly to the machine table.

(B) Hardened and ground locating pins assure +/- .0001" (.0025 mm) repeatability.

(C) MIDACO's patented "Dual Air Blast" blows air up through and across the contact pads for chip removal. (see inset)

PALLET

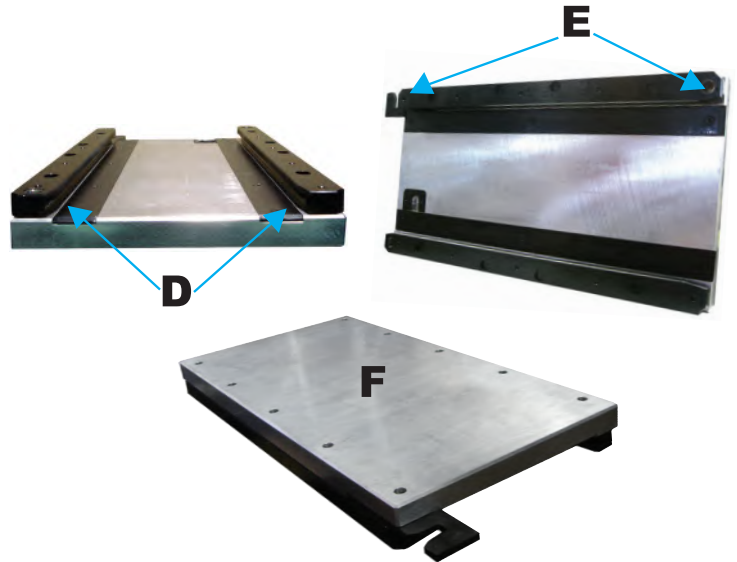

Precision ground steel rails (D) include hardened and ground bushings (E) to assure accuracy and durability.

Standard plain cast aluminum pallets (F) offer extreme versatility.


Cast Iron and T-Slotted Cast Iron custom pallets are optional.

CE Light Curtain



All models of the Automatic Pallet Changer System are available with a **Light Curtain** package for CE compliance.

With 3-sided guarding via a light emitter, mirrors and sensors, a pallet change will not occur if the invisible light beams surrounding the shuttle system are breached.

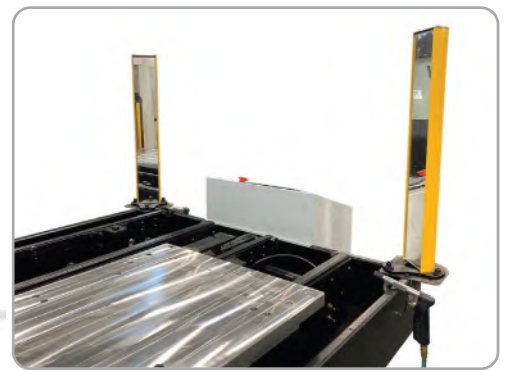

Since 1969, MIDACO has been a leader in providing innovative and quality solutions to improve manufacturing efficiency for companies worldwide.

CUSTOMER SATISFACTION

"Since I've added 5 MIDACO pallet changers, I've increased my productivity OVER 600%."

"100% plus increase in productivity without suffering quality."

"Productivity has increased over 90% and downtime due to loading and unloading parts was greatly reduced."

"25% savings in job set up time, eliminating lifting of heavy devices such as vises and rotary heads."

"We have achieved a 2 hour savings in production during an 8 hour shift, a 25% increase in productivity."

"I've been in the industry for over 25 years and have seen a lot of different machines and pallet changers. MIDACO's product is the best and most user friendly I've seen."

VARIOUS SYSTEMS AVAILABLE

Various pallet sizes, manual and dual systems are available along with other accessories designed to meet your needs.



Manual Pallet System



Dual Automatic System




Micro Pallet System - MPS31



Automatic Door System



Industrial CNC Vacuums








Trunnion System for 4th Axis

Specifications

■ Optional Midaco Fan for Automated Chip Cleaning

Note: Diagram shown with optional Light Curtain



Automatic	A16SD	A30SD	A40SD	AS40SD	AS50SD	A50SD	A60SD	A80SD	A120SD	A150SD
Specifications	lbs. / in	kg / mm	lbs. / in	kg / mm	lbs. / in	kg / mm	lbs. / in	kg / mm	lbs. / in	kg / mm
Clamping Force*	4500	2041.2	5200	2358.7	5200	2358.7	7500	3401.9	7500	3401.9
Receiver Weight	95	43.1	243	110.2	243	110.2	243	110.2	594	269.4
Pallet Thickness	1.0	25.4	1.5	38.1	1.5	38.1	2.0	50.8	2.0	50.8
Pallet Load Cap**	250-500	113-227	1000†	454	1000†	454	2000	907	2000	907
A (Pallet X Dim)	22-27	559-686	30	762	40	1016	45	1143	50	1270
B (Pallet Y Dim)	14-15	356-381	15.5-19	394-483	19-24	483-610	24	609.6	19-24	483-610
C	4.1	104.9	5.2	131.3	5.2	131.3	5.7	144	6.9	174
D	2.5	63.5	2.6	65	2.6	65	2.6	65	3.8	95.3
E	45	1143.0	54.5	1384.3	68	1727.2	74.8	1899.9	78	1981.2
F	35.2	894.1	36-45	914.4-1143	45	1143.0	54.2	1376.7	57	1447.8
G (Min Height)	34.8	883.9	38	965.2	38	965.2	38	965.2	38	965.2
H (Max Height)	44.8	1137.9	49	1244.6	49	1244.6	49	1244.6	52	1320.8
J (Receiver)	13	330.2	15.5	393.7	15.5	393.7	15.5	393.7	19.5	495.3
K (Receiver)	18	457.2	30	762	30	762	30	762	50	1270
L (Door Opening)	16	406.4	20	508	20	508	20	508	28	711.2
M (LC Height)	24	621	24	621	24	621	24	621	24	621
N (LC Opening)	30-36	769-922	39.9	1014	49.9	1269	59.9	1522	59.9	1522

*At 100PSI (6.9 bar) **At 120PSI (8.2 bar) with weight evenly distributed † Optional 2000 lb (909kg) pallet load capacity with weight evenly distributed Patented. Specifications subject to change without notice.

MIDACO pallet systems are designed for machines with stationary guarding. Some machines require options or customization. Contact your sales representative to confirm model and specifications for all applications.



MIDACO CORPORATION

2000 E. Touhy Avenue
Elk Grove Village, IL 60007 USA
phone: 847.593.8420
fax: 847.593.8451
email: midaco@midaco-corp.com

KEEP THE SPINDLE RUNNING!

See how we fit your application
www.midaco-corp.com

